



ISSN Print: 2394-7500  
ISSN Online: 2394-5869  
Impact Factor: 5.2  
IJAR 2016; 2(9): 626-631  
www.allresearchjournal.com  
Received: 26-07-2016  
Accepted: 27-08-2016

**Hamidreza Moeini**  
Department of Civil  
Engineering, Islamic Azad  
University, Roudehen Branch,  
Tehran, Iran

## Seismic performance and column frame system

**Hamidreza Moeini**

### Abstract

The Linked Column Frame is suggested as a steel seismic load resisting system including of two elements: a primary lateral system made up of dual columns interconnected with link beams and a secondary moment frame. It can define a new brace-free lateral structural steel system intended for rapid return to occupancy performance level. LCF is more recessive under a design level earthquake than the conventional approaches. The structural system consists of moment frames for gravity that combines with closely spaced dual columns (LC) interconnected with bolted links for the lateral system.

The LC links are sacrificial and intended to be replaced following a design level earthquake. The centerpiece of this work was a unique full scale experiment using hybrid testing; a combination of physical test of a critical sub-system tied to a numerical model of the building frame. This paper outlines the experimental setup, testing and validation of the LCF steel frame system. Hybrid testing allows for full scale study at the system level accounting for the uncertainties via experimental component and having the ability to model more conventional behavior through numerical simulation. The experimental sub-system consisted of a two story LCF frame with a single bay while the remainder of the building was numerically modeled. Two actuators per story were connected to the specimen.

**Keywords:** Rapid return to occupancy, seismic performance, column frame system

### 1. Introduction

New design codes and structural systems have been successful in intercepting collapse and loss of life in recent earthquakes. However, damage to conventional structural systems continues to result in significant economic losses. New systems are needed that integrate collapse prevention with post event ease of repair. Modern structural systems are being developed with emphasis on immediate occupancy following a design level earthquake. An example of these includes developments of damage free beam column connection, either through post tensioning or friction based resistance<sup>[2]</sup>. An alternative approach to immediate occupancy performance level is to design for damage in non-gravity members that could be replaced. Such structural systems would be capable of rapid repair that would facilitate return to occupancy following a seismic event.


In this study, a new seismic load resisting system, the linked column frame system (LCF), is being studied and shown in Figure 1. During the initial development of the system, non-moment transferring connections were introduced at all columns to foundation locations and in strategic beam to column locations (Dusicka and Iwai 2007). This system consists of easily replaceable link beams between two closely spaced columns and an adjacent flexible moment resisting frame. The LCF links behave similarly to links in eccentrically braced frames and dissipate energy while limiting the inelastic deformation and related damage to the structural members of the adjacent moment resisting frame. In this study, the seismic performance of the LCF system is investigated through numerical simulation. Nonlinear response history analyses of several prototype LCF designs subjected to a range of ground motions representing different seismic hazard levels are discussed. A design procedure is suggested that ensures the links of the linked columns yield at a significantly lower story drift than the beams of the moment frame, enabling design of this system for three distinct performance states: linearly elastic; rapid return to occupancy, where only link damage occurs and quick link replacement is possible; and collapse prevention. Results of nonlinear response history analyses show that the LCF system has the capability to limit economic loss by reducing structural damage and allowing for rapid return to occupancy.

**Correspondence**  
**Hamidreza Moeini**  
Department of Civil  
Engineering, Islamic Azad  
University, Roudehen Branch,  
Tehran, Iran

Also, the LCF system and component behavior s are being investigated experimentally through hybrid testing and an overview of the large-scale 2-story test program is presented.

**2. Review of Linked Column Frame System**


The proposed LCF system shown in Figure 1 consists of two components that work essentially in parallel to provide the desired seismic response. Brace-free frames are the lateral systems of choice when design constraints need to accommodate large openings. The LCF system is a new lateral load resisting system with the goals of rapid return to occupancy (buildings can be rapidly re-occupied after future large earthquakes) via replacement of sacrificial components. The system consists of moment frames (MF) and linked columns (LC) with replaceable links. The MF provides priority gravity load-carrying capacity and under earthquake excitation the structure remains elastic. The primary lateral force resisting system, denoted the linked column (LC), is made up of two closely spaced columns connected with replaceable link beams. The secondary lateral force resisting system is a moment resisting frame (MF) that also acts as part of the gravity load system. The moment resisting frame is designed to be relatively flexible by utilizing beams with fully restrained connections at one end and simple connections at the other. The links are designed to act as yielding elements and provide a stable source of energy dissipation until large drifts are reached and plastic hinging occurs in the MF beam.

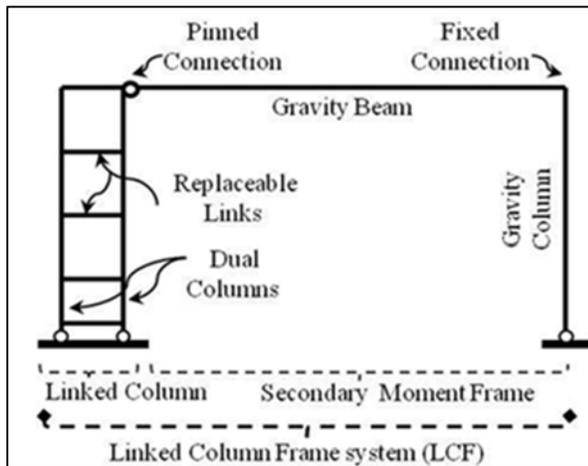

**Fig 1:** Plane Frame Elevation of a Building Bay with the Linked Column Frame System

The pushover response of an idealized LCF system and the contribution of its components, i.e., the moment frame and the linked column, are shown in Figure 2. As shown, the resulting lateral response of the LCF system shows three performance objectives, which include: Immediate occupancy (IO) following an earthquake with a 50% probability of exceedance in 50 years (50% in 50 year), requiring both the linked column and moment frame to remain elastic (Damage State 1 (DS1)); Rapid return to occupancy (RRO) following an earthquake with a 10% probability of exceedance in 50 years (10% in 50 year) where the moment frame remains completely elastic but plastic hinges develop in the links, which may necessitate their repair or replacement (Damage State 2 (DS2)); and Collapse prevention (CP) following an earthquake with a

2% probability of exceedance in 50 years (2% in 50 year) where significant yielding and plasticization of the links and moment frame beams may occur (Damage State 3 (DS3)). The LCF system also offers architectural advantages of open perimeter bays and occupation versatility in the interior floor layout. During the initial development of the system [3], non-moment transferring connections were introduced at all columns to foundation locations and in strategic beam to column locations. These idealized pin connections at the base of each column limit yielding at the foundation and thereby minimize damage to the columns that is typical in ductile moment frame designs. The idealized pin connections in the MF beams reduce the lateral stiffness of the gravity moment frame. Complementary numerical and experimental study has been carried out on bolted links that are either shear or moment dominated [4]. Other experiments on a steel frame with multiple sacrificial metal rods at mid-length of the links that were distributed throughout a story height had also indicated favorable cyclic response [5]. Also, system level numerical model development and analyses of the LCF system have been done considering non-linear static analyses [6] and time history analyses [7] leading to design procedure approaches for the LCF system toward performance level response.

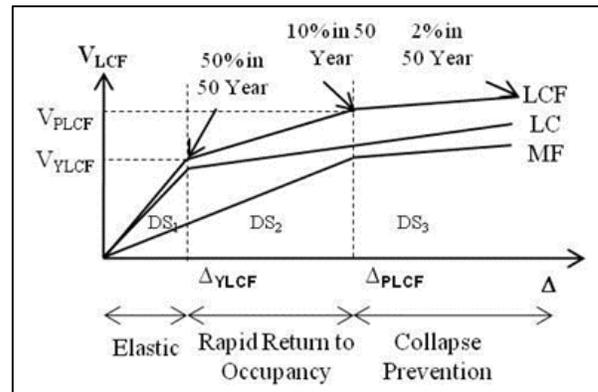

**Fig 2:** Idealized LCF and Component Pushover Curve

The YLC and YMF may be estimated via pushover analysis using common structural analysis software or by using separate plastic analyses of the linked columns and moment frames and their elastic stiffness. To ensure that the development of the first plastic hinge in the beams occurs after significant inelastic link deformation, the beams in the LCF system are pinned at the connections to the LC as illustrated in Figure 1.

**3. Overview of Prototype Designs**

During the product design and prototyping process there are different development stages which require different types of prototypes. The first question you should ask yourself is what type of prototype you need. Is it to demonstrate the functionality of the product, a simple visualization, or getting it ready for manufacture? It is a good idea to seek professional help as building a prototype can be prohibitively expensive. Prototype LCF systems were designed for modified versions of the SAC buildings (Gupta and Krawinkler, 1999). The buildings considered were 3-, 6-, and 9-stories tall with uniform 3.96 m (13 ft) story height. Story masses, plan dimensions, and dead and live loads were consistent with the SAC buildings. The LCF systems

were designed for a site class D soil and adjusted maximum considered earthquake spectral response parameters at 0.2 sec. and 1 sec. In order to maintain the overall plan dimensions of the SAC buildings, beam lengths had to be decreased due to the introduction of the linked column. Two bays of LCs were used for the 3- and 6-story LCFs as shown in Figure 3. In total, nine different LCF systems were designed. Their overall designs are discussed here and their fundamental behaviours are compared and contrasted following the analytical model development section below. Table 1 shows the primary characteristics of the different designs. The naming convention for the prototype variations in Table 1 starts with the number of stories. For the 3-story LCFs this is followed by a descriptor to show the relative strength of the LCs with respect to the MFs (SLC for strong LC, SMF for strong MF and SS for the same strength of LC and MF). For the 6-story LCFs, the number of stories is

followed by a descriptor for the type of links that have been used (S for shear link, I for intermediate link and F for flexural link) followed by the LC column spacing in inches. For the 9-story LCFs, the number of stories is followed by the number of LCs in one frame line, which is either 2 or 3.

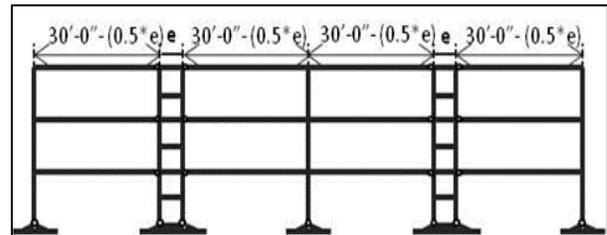


Fig 3: LCF Model Based on SAC Model

Table 1: Design Characteristics of LCF Buildings

Name	No. of Stories	No. of LCF Bays	LCF Column Spacing (m)	Link classification
3-SLC	3	2	1.56	Shear
3-SMF	3	2	1.56	Flexure
3-SS	3	2	1.54	Shear, Intermediate, Flexure
6-S-80	6	2	2.08	Shear
6-I-100	6	2	2.78	Intermediate
6-I-120	6	2	3.23	Intermediate
6-F-120	6	2	3.15	Flexure
9-2b	9	2	3.09	Shear, Intermediate, Flexure
9-3b	9	3	3.08	Shear, Intermediate, Flexure

4. Analytical Models

The structural analysis software Open Sees (Mazzoni *et al.*, 2009) was used to develop analytical models of the prototype LCF systems. The models are an assembly of beam-column elements with cyclic load-deformation behaviours calibrated to represent the behaviours of the links, beams and columns. The selected method for modeling the link behaviour uses a distributed plasticity beam-column element with a fiber cross-section that controls the axial and flexural response and is aggregated with an independent nonlinear shear force vs. shear deformation section. For axial and flexural response, the material stress-strain behaviour is specified and applied to the fibers. For the shear response, a shear stress-strain behaviour is specified and simply multiplied by the shear

area, which for wide-flange sections is the web area (Malakoutian, 2011). The hysteretic material model available in Open Sees was applied to the fiber cross-section and parameters were calibrated to experiments. Degradation of response was modelled using additional uniaxial material models combined with the hysteretic material model. Two different models for deterioration were chosen because of the difference in the observed degradation of shear and flexural links.

Figure 4 shows the cyclic shear force vs. total link rotation response of the link element with calibrated material properties along with the cyclic shear force vs. total link rotation response of selected link test specimens from Dusicka and Lewis (2010).

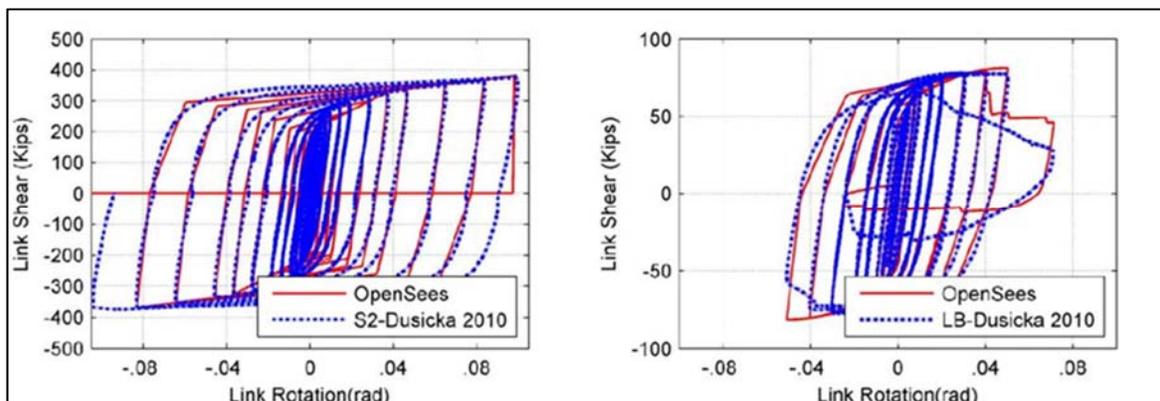


Fig 4: Comparison of Experimental Link Shear vs. Link Rotation Results with the Developed Open Sees Model. (a) Shear Link (S2, W12X96) (b) Flexural Link (LB, W12X22) (Dusicka and Lewis, 2010)


The beams and columns were modelled using force-based distributed plasticity beam-column elements with fiber cross-sections. The steel material for the columns and beams was modeled using the Steel02 Material available in Open Sees, which is a Giuffre-Menegotto-Pinto model. An approximate yield stress of 345 MPa (50 ksi) was used with 2% strain hardening of as these are typical values for the steel used for rolled wide flange shapes. The value of the parameter R0, which controls the sharpness of the transition from the elastic to plastic branches in the Giuffre-Menegotto-Pinto model, was taken as 20.

Monotonic and cyclic pushover analyses were performed on the LCF models using a lateral load distribution determined by the code-prescribed equivalent lateral forces applied at the floor levels to explore the system behaviour. The progression of yielding and cyclic pushover response of the system for LCF-3SLC is shown in Figure 5. As shown, the first link plastic hinge forms at a roof drift of 0.69% and the first plastic hinge develops in a beam at a roof drift of 1.59%, where a link plastic hinge is when the plastic shear

strength is achieved and a beam plastic hinge is when the plastic moment is achieved. At 5% drift there is extensive link and beam plastification. The large difference between the story drifts at which the links and beams develop plastic hinges enables the structural designer to specifically design for the two different performance objectives of rapid return to occupancy and collapse prevention.

**5. Fundamental Characteristics of the Prototype Lcf Systems**

As described previously and shown in Table 1, several LCF systems were designed at 3-, 6- and 9-stories. For each system, three different pushover analyses were done: pushover analysis of the system with hinges at the beam ends; pushover analysis of the system with the hinges at the link ends; and pushover analysis of the complete system. These analyses enable approximation of the contributions of the LCs and MFs to the total response. The resulting characteristic system values are shown in Table 2 for all LCF designs.

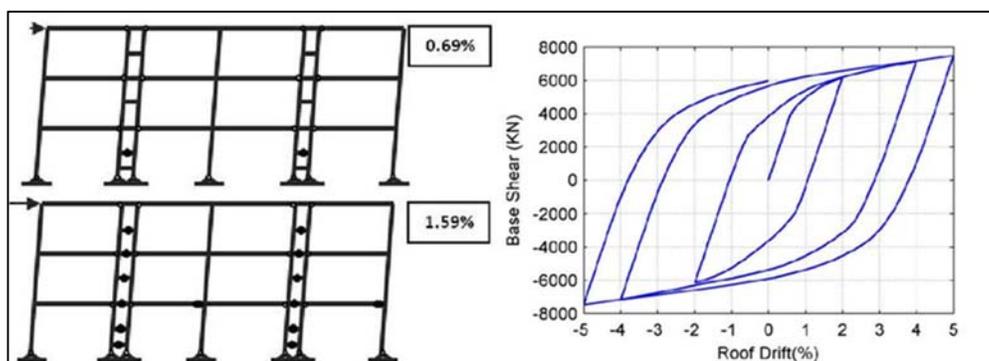

**Fig 5:** Pushover Response of LCF (a) Pattern of Plastic Hinge Formation (b) Cyclic Analysis

Three different 3-story LCF systems were designed for this study. These systems were designed such that each has a similar overall behaviour including the total strength,  $V_p$ , and the fundamental period. However, each 3-story system has different types of links (shear, flexural or intermediate), and therefore, different relative strengths of the LCs with respect to the MFs.

Four different 6-story LCF systems were investigated. They again were designed to have similar overall behaviour; however, these systems not only differ in link type, but also in the spacing of the linked columns and corresponding link lengths. Various link lengths were employed to examine the impact of overturning moment on LCF behaviour.

In the 9-story designs, two different layouts were chosen as discussed previously, one with two sets of linked columns (LCF 9-2b) and the other with three sets of linked columns (LCF 9-3b), however, the link lengths were the same.

**Table 2:** Fundamental Characteristics of 3-, 6- and 9-Story LCF

Name	T(sec)	$K_e$ (KN/m)	YMF/YLC	$V_{YMF}/V_{YLC}$
3-SLC	0.82	37542	1.86	0.58
3-SMF	0.86	37019	2.87	2.12
3-SS	0.87	37413	2.66	0.86
6-S-80	1.43	38256	1.59	0.56
6-I-100	1.43	38356	1.55	0.45
6-I-120	1.28	38298	1.77	0.67
6-F-120	1.21	38708	1.79	0.34
9-2b	1.46	32908	1.32	0.45
9-3b	1.65	361245	1.55	0.49

**6. Dynamic Response Results**

After establishing the basic characteristics of the LCF systems considered, nonlinear response history analysis was performed on each. Three suites of 20 earthquake ground motion records were used in the nonlinear analyses. The ground motions were those developed in the SAC project for the Los Angeles site by Somerville *et al.* (1997) for soil type D. These three suites of ground motions represent three seismic hazard levels: 50% in 50 year, 10% in 50 year, and 2% in 50 year earthquakes scaled to target spectral acceleration values at four periods by Somerville *et al.* (1997). Figure 6 shows the median and 84th percentile values for the maximum story drift, link rotation and beam rotation obtained for the ground motions for each hazard level just for LCF-3SLC due to space limitation. The other eight buildings have similar trends. As shown in Figure 6, the LCF is capable of meeting drift limits since the story drifts for each hazard level are within ranges that would be considered acceptable for most applications, i.e., less than 1% for the 50% in 50 year hazard, less than 2% for the 10% in 50 year hazard and less than 5% for the 2% in 50 year hazard. The rotation of which plastic hinge forms,  $\gamma_p$ , is shown by vertical solid lines for reference for link deformation plot in Figure 6. As shown, the links are predominantly elastic for the 50% in 50 year hazard and should not require repair. In the 10% in 50 year hazard, links in all stories have rotations larger than  $\gamma_p$  and some may have damage that warrants link replacement. In the 2%

in 50 year hazard level the links have larger inelastic demand and are even more likely to require replacement. The beam rotation demands,  $\theta$ , for the three hazard levels with  $\theta_p$ , the approximate rotation at which a plastic hinge forms, are also shown in Figure 6. As shown, beam initial

plastic hinge formation does not occur until the 2% in 50 year hazard level. This ensures that no repairs would be necessary following the design basis earthquake, which achieves the performance objectives and will help to minimize post event repair costs and downtime.

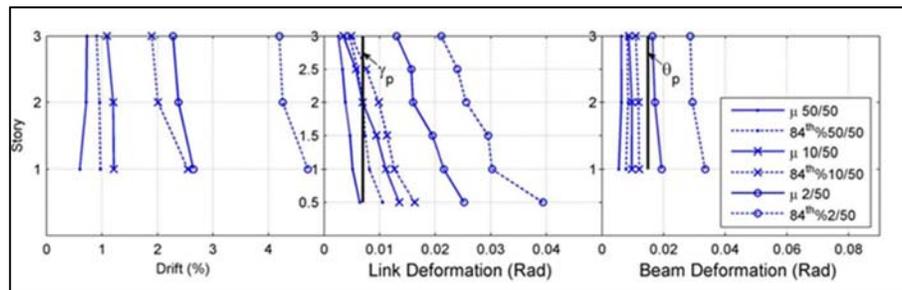


Fig 6: Median and 84th Percentile Story Drift Results for 3-, 6- and 9-Story LCF Buildings

### 7. Lcf Hybrid System Test Setup

Three LCFs have been designed to be tested for the purposes of evaluating LCF behaviour and further validation of numerical models. These three systems are as follows: LCF-B-ISL which has built-up sections for the links and has links only at inter-story locations; LCF-B-L which has built-up sections for the links and has links at both floor and inter-story locations; and LCF-W-L which has built-up sections for the links and has links at both floor and inter-story locations.

LCF systems will be investigated experimentally as full-scale 1-bay and 2-story structures. All steel is assumed to be 345 MPa nominal yield stress except for the links which are assumed to be 250MPa. The typical bay width is 7.5 m, the typical story height is 3.0 m, and each linked column is spaced 1.0 m apart. Links are bolted to the columns to facilitate post-earthquake replacement. The LCF moment frame is expected to remain elastic under moderate seismic demands, while links are expected to yield and deform plastically. For large demands beam yielding is also expected. The hybrid test scheme developed for LCF combines physical testing with model-based simulation to investigate the overall structure response. To perform the LCF hybrid simulation Open Sees will be used as finite element software to model and analyze the LCF. The Open-source Framework for Experimental Setup and Control, Open Fresco, will be used to connect the finite element analysis software with a control and data acquisition software.

### 8. Conclusions

A new lateral load resisting system denoted the linked column frame system (LCF) that can provide rapid return to occupancy following an earthquake event was discussed. The system incorporates replaceable links placed between closely spaced columns, combined with a secondary moment frame where the links are designed to develop plastic hinges well before the beams of the secondary moment frame. A LCF system was investigated experimentally via hybrid simulation to validate the response at a system level. The system experiment was a combination of physical test of a critical sub-system tied to a numerical model of the building. The results of nonlinear response history analysis of a series of 3-, 6- and 9-story LCF show that all LCFs achieved the key design objectives, namely, that no repair is needed after a 50% in 50 year event as only minor link yielding was observed, that rapid return to occupancy by replacing the damaged links is achieved for a 10% in 50 hazard level as plastic hinging was successfully limited to the links and that collapse prevention for 2% in 50 year hazard level is achieved since the story drifts were generally less than 5%. Additionally, even though most LCF designs were drift controlled, all story drifts from response history analyses were less than 2% for the 10% in 50 year earthquakes, which approximated the design seismic demands. This performance for the design seismic demands is acceptable. System level experiments using NEES infrastructure and hybrid simulation are underway to verify these conclusions.

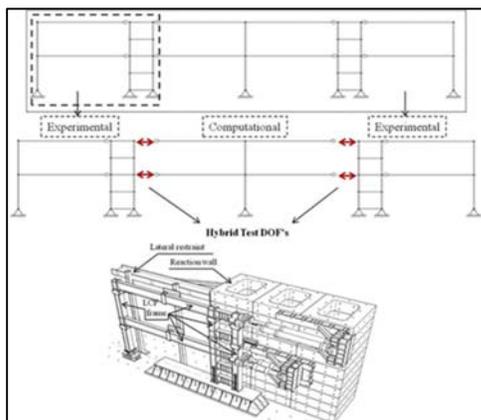


Fig 7: Proposed Experimental Setup for the LCF

### 9. References

1. Dusicka P, Lewis G. Investigation of Replaceable Sacrificial Steel Links. Proceedings of the 9th U.S. National and 10th Canadian Conference on Earthquake Engineering, EERI, 2010, 1659.
2. Dusicka P, Iwai R. Development of Linked Column Frame System for Seismic Lateral Loads. Proceedings of the SEI Structures Congress, American Society of Civil Engineers, Vancouver, B.C, 2007.
3. FEMA P695 Quantification of Building Seismic Performance Factors, Technical Report SAC Joint Venture for the Federal Emergency Management Agency, Washington, D.C. 2008, 695.
4. Gupta A, Krawinkler H. Seismic Demands for Performance Evaluation of Steel Moment Resisting Frame Structures, Technical Report John A. Blume

- Earthquake Engineering Center, Stanford University, Stanford, CA, 1999, 132.
5. Malakoutian M. Seismic Response Evaluation of the Linked Column Frame System, Ph.D. partial fulfillment, Civil and Environmental Engineering Dept., University of Washington, Seattle, WA, 2011.
  6. Mazzoni S, McKenna F, Scott MH, Fenves GL. Open System for Earthquake Engineering Simulation User Command-Language Manual- OpenSees Version 2.0, Pacific Earthquake Engineering Research Center, University of California, Berkeley, Berkeley, CA, 2009.
  7. Somerville P, Smith N, Punyamurthula S, Sun J. Development of Ground Motion Time Histories for phase 2 of the FEMA/SAC Steel Project, Technical Report SAC/BD-97/04, SAC Background Document, 1997.
  8. Ricles JM, Sause R, Garlock MM, Zhao C. Post Tensioned Seismic-Resistant Connections for Steel Frames. *Journal of Structural Engineering*. 2001; 127(2):113-121.
  9. Khoo HH, Clifton GC, Butterworth JW, Mathieson CD, MacRae GA. Development of the Self-Centering Sliding Hinge Joint. *Proceedings of the 9th Pacific Conference on Earthquake Engineering*, Auckland. 2011,
  10. Dusicka P, Iwai R. Development of the Linked Column Frame System for Seismic Lateral Loads.
  11. *Proceedings of the American Society of Civil Engineers Structures Congress*, Long Beach, California, 2007.
  12. Dusicka P, Lewis G. Investigation of Replaceable Sacrificial Steel Links. *Proceedings of the 9th US and 10th*
  13. *Canadian Conference on Earthquake Engineering*, Toronto, Canada, 2010.
  14. Palkopoulou O, Karydakis P, Vayas I. Innovative Bracing System for Seismic Resistant Steel Structures.
  15. *Proceedings of the International STESSA Conference Behaviour of Steel Structures in Seismic Areas*, Philadelphia, Pennsylvania, 2009.
  16. Lopes A, Dusicka P, Berman J. Design of the Linked Column Frame Structural System. *Proceedings of the International STESSA Conference Behaviour of Steel Structures in Seismic Areas*, Santiago, Chile, 2012.
  17. Malakoutian M, Berman J, Dusicka P. Seismic Response Evaluation of the Linked Column Frame. *Earthquake Engineering and Structural Dynamics* 2013; 42:795-814.
  18. FEMA-355C. State of the Art Report on Systems Performance of Steel Moment Frames Subject to Earthquake Ground Shaking. SAC Joint Venture, Washington-DC, 2000.